


## DRIVER SPECIFICATIONS

### Parameter


|                 |             |
|-----------------|-------------|
| Fs              | 74 Hz ± 20% |
| SPLo ( 1m/1w)   | 87dB±2dB    |
| Qts             | 0,69        |
| Vas             | 6.95 Litr   |
| Rated Impedance | 4 Ω ± 15%   |
| Rated power     | 30 Watts    |
| Long Term Power | 60 Watts    |
| Fr. Response    | 74Hz~15KHz  |
| Shielding       | /           |

### Impedance vs Freq

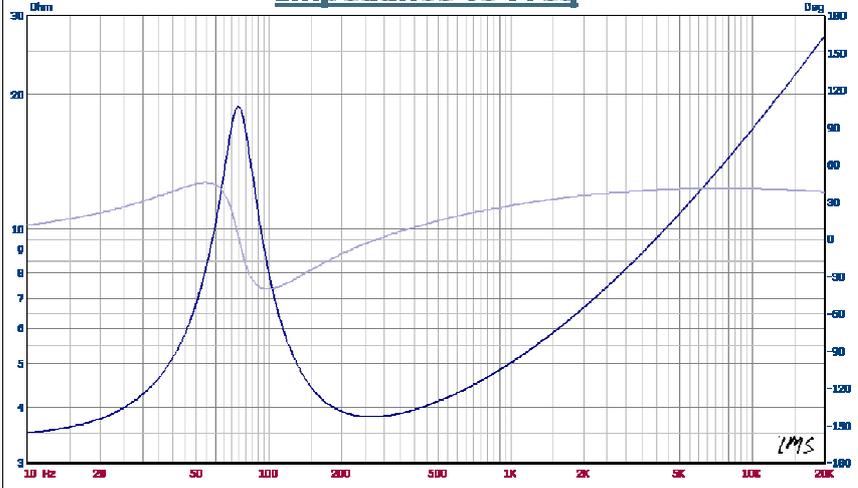

### Structure of Driver

|                 |                |
|-----------------|----------------|
| Diaphragm       | Mod. Cellulose |
| Frame/panel     | Iron           |
| Magnet Diameter | Φ 90mm         |
|                 | Φ 80mm         |
| Magnet Weight   | 350g/12.4oz.   |
|                 | 184g/6.5oz.    |
| voice Coil      | Asv Φ 25.5mm   |
| Weight          | 1.1kg          |

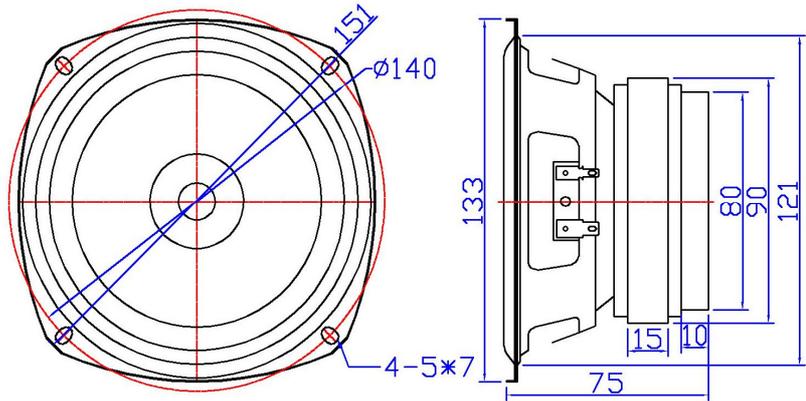

### Picture

